


防伪可打印高频标签



Tamper Proof Printable HF NFC Tag

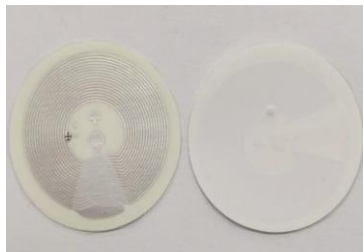

基本参数/Basic Parameters


| | |
|---------------------------|--|
| 尺寸/Size (L/OD x W/ID x H) | 32*0*0.1mm(ID & OD圆形内外径/ID & OD means inner & outer diameter of round tag) |
| 面材封装/FaceStock or Housing | 可打印易碎纸/Printable Brittle Paper |
| 安装方法/Installation | 胶粘/Adhesive |
| 天线工艺/Antenna Type | 铝天线/Aluminum Antenna |
| 技术/Technology | 平面微带/Microstrip Flat Style |
| 离型纸/Backing Liner | 单面离型透明PET/Single Silicon & Transparent PET Liner |
| 特征/Characters | 防伪(Tamper Proof) |

产品特性/Product Feature

| | |
|--------------------------|---|
| 芯片/Chip Model | FM11RF08 |
| 协议/Protocol | ISO14443A |
| 频率范围/Operating Frequency | 13.0-14.5Mhz |
| 内存/Memory | TID/UID 7bytes+ EPC/Block 16block(4x16bytes)+ User 1Kx8bits+ Reserve |
| 读距/Reading Range | 3cm (depends on reader) |
| 应介质/Applicable Surface | |
| 个性化选项/Option | 定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding |
| 附加说明/Additional | |

供货方式/Delivery & Supply Format

卷料供货每卷数量1000-3000片(特殊要求见附加说明) Supply in roll with 1000-3000PCS/Roll(Check Additional Note for your specific needs)

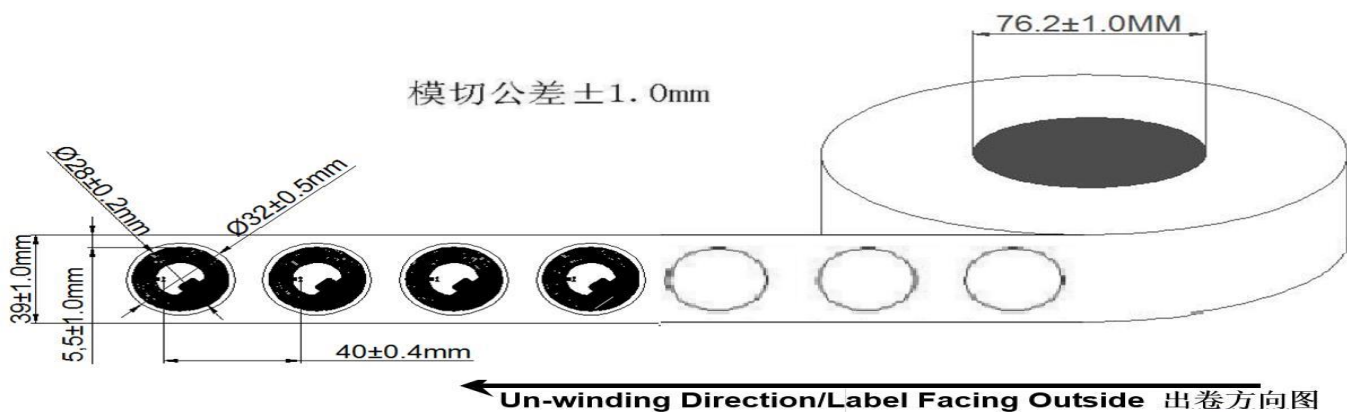

应用场景/Application

防伪标签主要是用在香烟、酒品（如红酒、啤酒、白酒等）、化妆品、药品、农药、农副产品、食品、动物溯源、零配件领域，以实现产品的标识、跟踪、及溯源查询或监管，包括物流供应链、数字化仓储、溯源监管，以及相关涉密文件档案、信件、支票发票、证件、考试试卷案宗，如学生证、监狱犯人档案、银行汇票、文件袋封签、箱封、产品QC/保修封条等等。Anti-counterfeiting tag mainly used for Tobacco/Cigarette, Liquors(white wine/black wine/beer/whisky), cosmetic, medicine, drug/medicine, Farm chemical like pesticide, food, animal traceability, spare part anti-fake tracking as a product identification for item/goods tracking, monitoring and supervision management. Including logistics supply chain, digital warehousing, source traceability, even more related security document and confidential files, letters, ticket, bank proof, certification, exam paper, special document seal like the prisoner's profile and so on document management, box seal, product QC sticker/warranty seal and so on.



环境参数/Environmental Parameter

| | |
|----------------------------|------------------------------|
| 数据保存/Data EEPROM Retention | 10years |
| 静电保护/ESD Limited Voltage | 2KV |
| 工作温度/Operating Temperature | -35℃ - 85℃ |
| 储存温度/Storage Temperature | 0℃ - 25℃ |
| 操作湿度/Relative Humidity | 10%-95%(Variant Performance) |

兼容打印机/Compatible Printers

| | |
|------------|-------------|
| 佐藤/SATO | CL4NX |
| 斑马/Zebra | ZT411RFID |
| 博思得/POSTEK | TX Series |
| 东芝/TOSHIBA | SX-4T SX-5T |

NOTE: The specification is subject to change without prior notice

| | |
|---------------------|---------------------------------|
| 批准 Approved By: | 制作审核 Prepared & Checked By: 张琼勇 |
| 日期 Date: 2020/08/21 | 日期 Date: 2020/11/10 |