

扎带型超高频标签

On Metal Use UHF Tag

Standard
标准




基本参数/Basic Parameters

尺寸/Size (L/OD x W/ID x H)	47.5*26*2mm(ID & OD圆形内外径/ID & OD means inner & outer diameter of round tag)
面料封装/FaceStock or Housing	塑料外壳/PP Housing
安装方法/Installation	捆扎/卡扣/锁扣型/Tie up,tight up,Inserting or Locking Style
天线工艺/Antenna Type	铝天线/Aluminum Antenna
技术/Technology	平面微带/Microstrip Flat Style
离型纸/Backing Liner	无/None
特征/Characters	抗金属(On Metal Use)

产品特性/Product Feature

芯片/Chip Model	M4E
协议/Protocol	ISO18000-6C GEN2
频率范围/Operating Frequency	920.5-924.5Mhz
内存/Memory	TID/UID 96bit+ EPC/Block upto 496bit+ User 128bit+ Reserve 32bit access & 32bit kill
读距/Reading Range	150cm (depends on reader)
应介质/Applicable Surface	空气(Air-free)/金属(On metal)/塑料(Plastic)/木板(Wood Board)
个性化选项/Option	定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding

附加说明/Additional

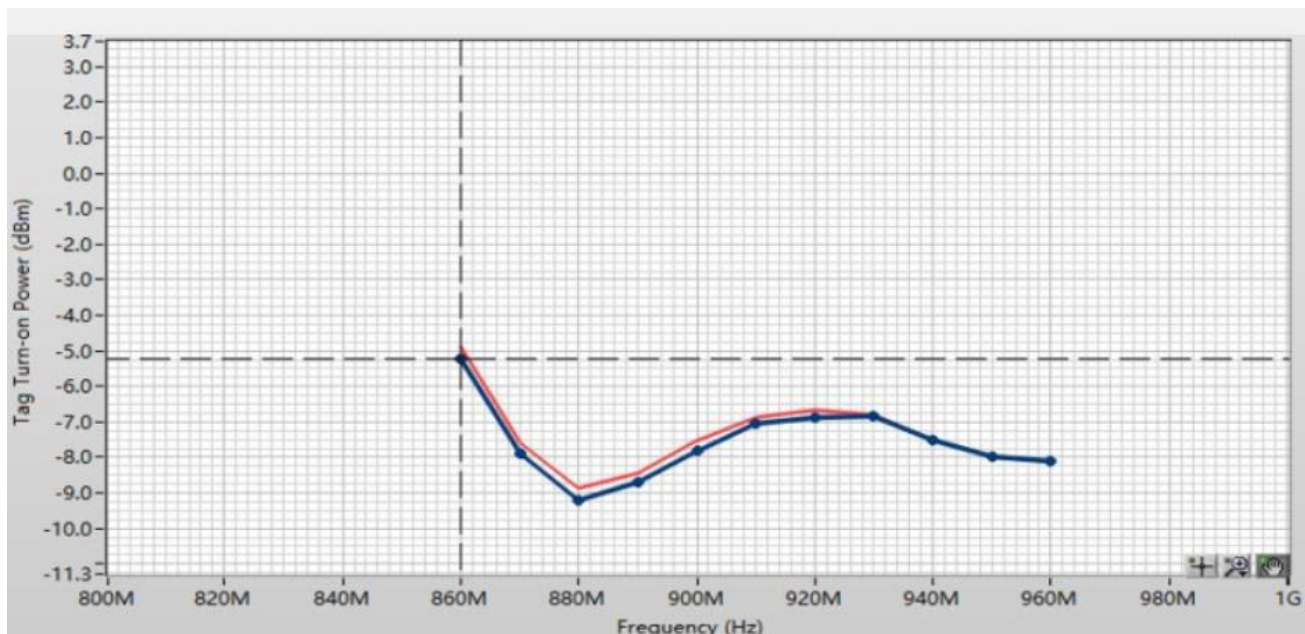

供货方式/Delivery & Supply Format

单片/单张/单个供货按照需要每100-1000片/个/张/包(特殊要求见附加说明) Supply in piece with 100-1000PCS/bag ((Check Additional Note for your specific request)

应用场景/Application

塑料扎带型标签可广泛应用于物流中转箱封口, 包装箱封, 集装箱、货架、设备仪器标识、医疗器械登记、固定资产、模具治具、零配件、化学药品、农副食品、动物管理领域, 以实现产品的标识、跟踪、及溯源查询或监管, 包括物流供应链、数字化仓储、溯源监管, 以及相关涉密物品或涉隐私产品的封箱运输等。Plastic Ribbon Tie tag seal mainly used for sealing package of boxes, containers, components, industry spare parts, mould tooling, spare parts, chemical, pesticide, food, animal and so on with products identification, tracking including supervision management, logistics supply chain, digital warehousing, source traceability, even more sealing for related security items and confidential goods for the person.

**环境参数/Environmental Parameter**

数据保存/Data EEPROM Retention	10years
静电保护/ESD Limited Voltage	2KV
工作温度/Operating Temperature	-35℃ - 85℃
储存温度/Storage Temperature	0℃ - 25℃
操作湿度/Relative Humidity	10%-95%(Variant Performance)

NOTE:The specification is subject to change without prior notice

批准Approved By: 制作审核Prepared & Checked By:李忠明
日期Date:2020/09/27 日期Date:2021/07/22