

普通超高频扎带标签

General UHF Tie Zip Tag




基本参数/Basic Parameters

尺寸/Size (L/OD x W/ID x H)	448*28*8mm(ID & OD圆形内外径/ID & OD means inner & outer diameter of round tag)
面材封装/FaceStock or Housing	塑料外壳/ABS Plastic Housing
安装方法/Installation	捆扎/卡扣/锁扣型/Tie up,tight up,Inserting or Locking Style
天线工艺/Antenna Type	铝天线/Aluminum Antenna
技术/Technology	平面微带/Microstrip Flat Style
离型纸/Backing Liner	无/None
特征/Characters	普通(General)

产品特性/Product Feature

芯片/Chip Model	Higgs3
协议/Protocol	ISO18000-6C GEN2
频率范围/Operating Frequency	860-960Mhz
内存/Memory	TID/UID 96bit+ EPC/Block 96bit+ User 512bit+ Reserve 32bit access/32bit kill
读距/Reading Range	600cm (depends on reader)
应介质/Applicable Surface	空气(Air-free)
个性化选项/Option	定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding

附加说明/Additional

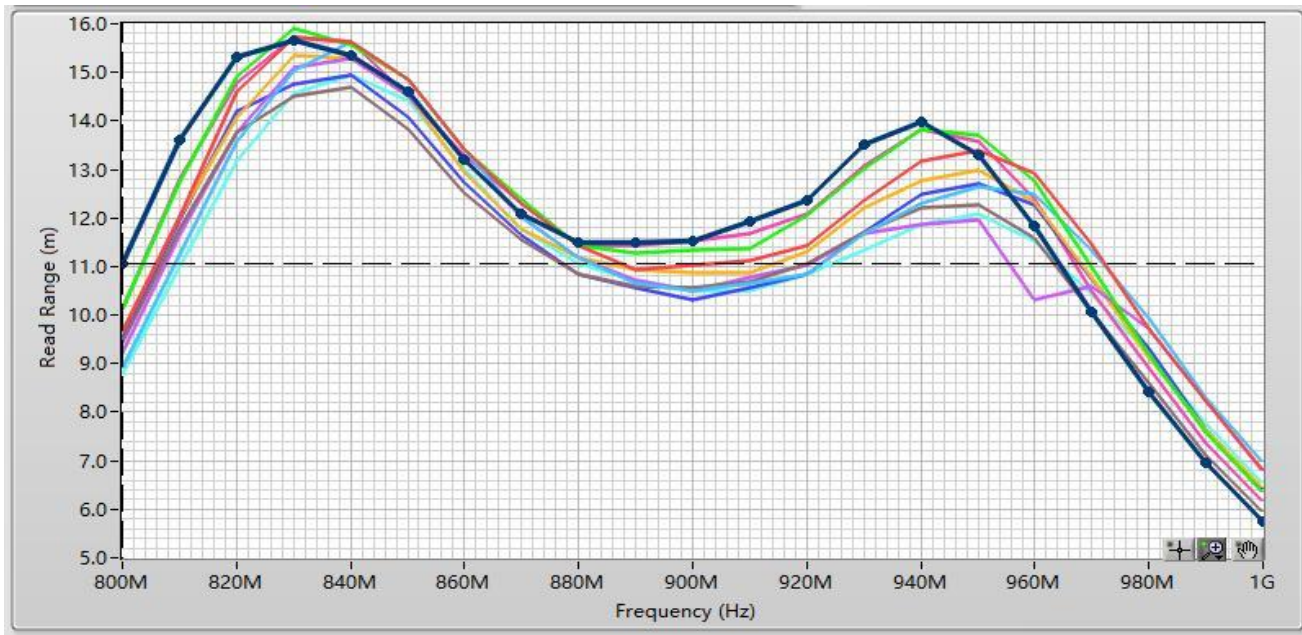

**供货方式/Delivery & Supply Format**

单片/单个/单张供货每袋50-200片/张(特殊要求见附加说明) Supply in piece or sheet with 50-200pcs per box(Check Additional Note for your specific request)

**应用场景/Application**

塑料扎带型标签可广泛应用于物流中转箱封口, 包装箱封, 集装箱、货架、设备仪器标识、医疗器械登记、固定资产、模具治具、零配件、化学药品、农副食品、动物管理领域, 以实现产品的标识、跟踪、及溯源查询或监管, 包括物流供应链、数字化仓储、溯源监管, 以及相关涉密物品或涉隐私产品的封箱运输等。Plastic Ribbon Tie tag seal mainly used for sealing package of boxes, containers, components, industry spare parts, mould tooling, spare parts, chemical, pesticide, food, animal and so on with products identification, tracking including supervision management, logistics supply chain, digital warehousing, source traceability, even more sealing for related security items and confidential goods for the person.

**环境参数/Environmental Parameter**

数据保存/Data EEPROM Retention	10years
静电保护/ESD Limited Voltage	2KV
工作温度/Operating Temperature	-35℃ - 85℃
储存温度/Storage Temperature	0℃ - 25℃
操作湿度/Relative Humidity	10%-95%(Variant Performance)

**NOTE:The specification is subject to change without prior notice**

批准Approved By: 张琼勇  
日期Date: 2021/08/31

制作审核Prepared & Checked By: 李献情  
日期Date: 2021/08/31